

ALU-line drawers

Technical specifications



01 WIDTH


	30	40	50	60			90	100										
					70	80			110	120	130	140	-	-	-	-	-	-
Drawer internal [mm]	257	357	457	557	-	-	857	957	-	-	-	-						
	Combinations of several drawers side by side																	
Unit external [mm]	315	415	515	615	715	815	915	1.015	1.115	1.215	1.315	1.415						

02 HEIGHT

	19	27	35	43	51	59	66	76	84	92	100	108	115	123	131	141	149	157	165
Drawer internal [mm]	117	196	275	354	432	511	590	669	Combinations of several drawers on top of each other										
Drawer type designation	A	B	C	D	E	F	G	H											
Aluminium drawer rail height [mm]	86	177	177	177	330	330	330	330											
Height of aluminium partition [mm]	76	168	168	168	320	320	320	320											
Unit external with top plate [mm]	191	270	348	427	506	585	663	761	839	918	996	1.075	1.154	1.233	1.310	1.409	1.488	1.566	1.644
Unit with raised edge 'low' 20 mm	207	286	364	443	522	601	679	777	855	934	1012	1091	1170	1249	1326	1425	1504	1582	1660
Unit with standing edge 'high' 110 mm	297	376	454	533	612	691	769	867	945	1024	1102	1181	1260	1339	1416	1515	1594	1672	1750

03 DEPTH

60	65	70	75	80	90	105	120	135	150	165	175	190	-	-	-	-	-	-	
457	507	557	607	657	757	902	1.047	1.192	1.337	1.482	1.627	1.772							
76%	78%	80%	81%	83%	85%	82%	85%	87%	88%	89%	90%	91%							
-	-	-	-	-	-	1 partition is mounted during production													
60 KG						100 KG													
Standard with spindles (*)						Standard with mounting bracket (*)													
* Mounting method can be adapted in production on request																			
588	638	688	738	788	888	1.033	1.178	1.323	1.468	1.613	1.758	1.903							
The height of the handle (32 mm) is included in the external dimensions																			

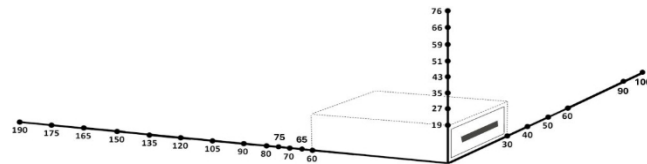

BEKSledes

04 WIDTH


	30	40	50	60	-	-	90	100	-	-	-	-	-	-	-	-	-	-	-
Slide internal [mm]	261	361	461	561			On request												
External slide [mm]	316	416	516	616															
External carriage (incl. bolts) [mm]	336	436	536	636															

05 HEIGHT

	13	22	37																
Slide internal [mm]	88	179	332																
External slide [mm]	126	217	370																

06 DEPTH

	30	35	40	45	50	55	60	70	80	90	100	110	120	130	140	150	200	-	-
Slide internal [mm]	295	345	395	445	495	545	595	695	795	895	995	1.095	1.195	1.295	1.395	1.495	1.995		
External slide [mm]	349	399	449	499	549	599	649	749	849	949	1.049	1.149	1.249	1.349	1.449	1.549	2.049		
Load capacity [kg]	120	120	120	120	120	120	120	120	120	120	120	120	120	120	120	120	-		
	-	-	-	-	-	-	-	-	220	-	220	220	220	220	220	220	220		



Open compartments

07 WIDTH

	10	20	30	40	50	60	70	80	90	100	110	120	130	140	-	-	-	-	-
Open compartment internal [mm]	77	176	275	374	473	572	671	770	869	968	1067	1166	-	-					
	Combinations of several open compartments next to each other																		
Unit external [mm]	115	215	315	415	515	615	715	815	915	1.015	1.115	1.215	1.315	1.415					

08 HEIGHT

	19	27	35	43	51	59	66	76	84	92	100	108	115	123	131	141	149	157	165
Open compartment internal [mm]	161	240	318	397	476	555	633	731	Combinations of several open compartments one above the other										
	-	-																	
Unit external [mm]	191	270	348	427	506	585	663	761	839	918	996	1.075	1.154	1.233	1.310	1.409	1.488	1.566	1.644
Unit with leading edge 'low' 20 mm Unit with leading edge 'high' 110 mm	207	286	364	443	522	601	679	777	855	934	1012	1091	1170	1249	1326	1425	1504	1582	1660
	297	376	454	533	612	691	769	867	945	1024	1102	1181	1260	1339	1416	1515	1594	1672	1750

09 DEPTH

	60	65	70	75	80	90	105	120	135	150	165	175	190	-	-	-	-	-	-
Open compartment internal [mm]	540	590	640	690	740	840	985	1.130	1.275	1.420	1.565	1.710	1.855						
Unit external [mm]	556	606	656	706	756	856	1.001	1.146	1.291	1.436	1.581	1.726	1.871						

